


Avtron M484 Sensor for M485 and M685 Encoders

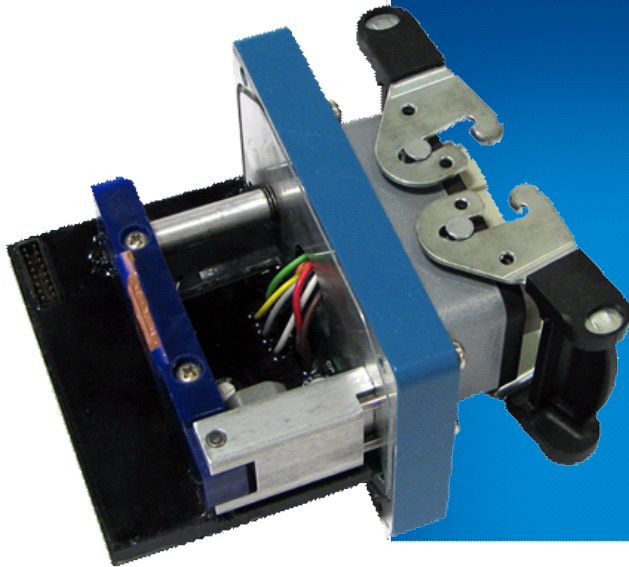

Replacement sensor for M485
and M685 Encoder

**M484 Sensors for M485
and M685 SMARTach (I)
Encoders**

M484

The M484 is a severe mill duty magnetic sensor for installation in M485 and M685 SMARTach (I) encoders. It features potted electronics, a diagnostic red/green LED and remote alarm contact. For new installations, Avtron recommends AV485 and AV685 severe duty encoders.

OUTLINE DRAWING

Check out our website for more detailed specifications, drawings, and installation instructions. www.avtronencoders.com

MORE M484 ADVANTAGESM484

SPECIFICATIONS

Operating Power: See Data Sheet for Available Models
Output Format: A Quad B (A,A/, B,B/)
Optional Marker Pulse (Z, Z/)
Frequency Range: 0 to 36 KHz
Maximum Instantaneous Current Output: 1500mA
PPR: 240-1200
Speed: 3600-4500 RPM Max. (See Data Sheet for Details)
Enclosure: IP65
Temperature: -40° to +80°C
Chemical: Polyurethane enamel paint protects against salt spray, mild acids, and bases.

All dimensions are in inches [millimeters].
Specifications and features are subject to change without notice.
SMARTach™ is a trademark of Avtron Industrial Automation, Inc.

SELECTION GUIDE



Nidec-Avtron Makes the Most Reliable Encoders in the World

8901 E. PLEASANT VALLEY ROAD • INDEPENDENCE, OHIO 44131-5508
TELEPHONE: (1) 216-642-1230 • **FAX:** (1) 216-642-6037
E-MAIL: tachs@nidec-avtron.com • **WEB:** www.avtronencoders.com



All dimensions are in inches [millimeters].
Specifications and features are subject to change without notice.
EU-SMART™, SMARTSafe™, SMARTach II™, THIN-LINE™, THIN-LINE II™, WIDE-GAP™, and BULLSEYE32™ are trademarks of Nidec Avtron Automation. All other trademarks and registered trademarks are the property of their respective owners.