


KAS High-Resolution Sine-Cosine Encoder Components

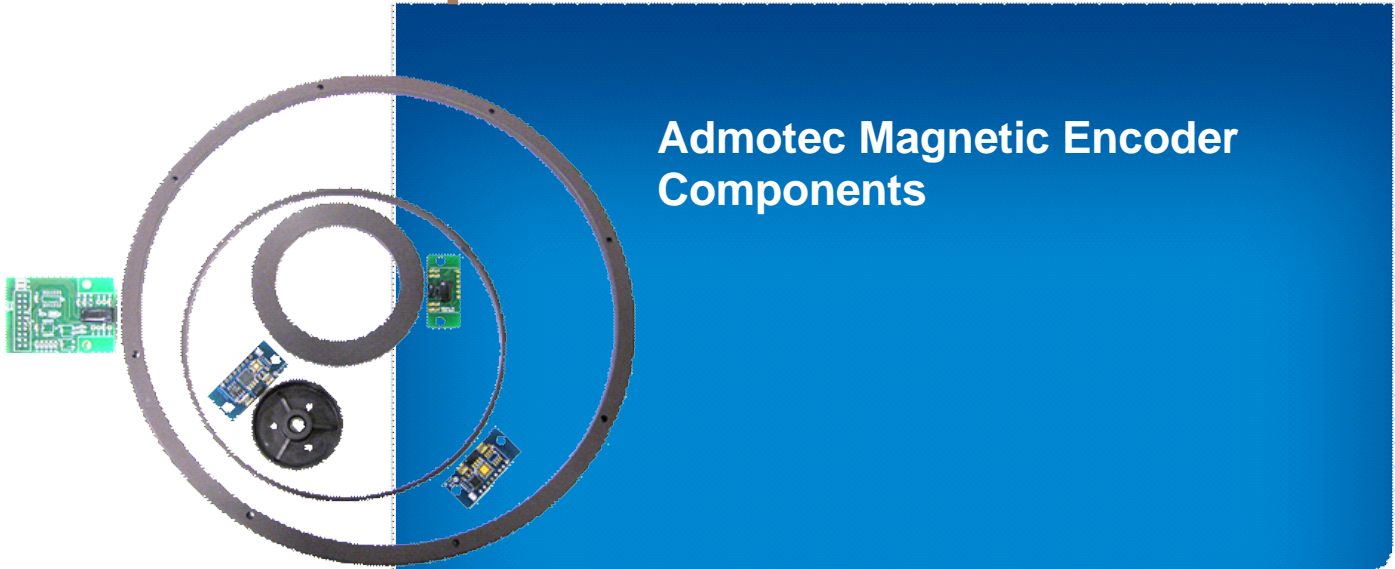

Admotec Magnetic Encoder Components

Obsolete: KAS Sine-Cosine Encoder

KAS

Admotec KAS sine-cosine magnetic encoder components are no longer available. KXS digital magnetic encoder components are available from Nidec-Avtron and may offer an alternative solution.

OUTLINE DRAWING

Check out our website for more detailed specifications, drawings, and installation instructions. www.avtronencoders.com

MORE KAS ADVANTAGESKAS SPECIFICATIONS

Resolution: 36-720 CPR (Sine-Cosine Cycles A, B)
Signal Outputs: S+, S-, C+, C- (Differential Sine-Cosine) (Optional Z+, Z-)
Maximum Speed: 100,000 RPM
Channel Frequency: 500 kHz maximum
Sensor-to-Rotor Airgap: 0.012" [0.3mm]
Angular Error: <4 arc minutes
Operating Temperature: -40 to 115 °C
Supply Voltage 5.0 ±0.25 Vdc
Supply Current 20 mA typical

SELECTION GUIDE



Nidec Industrial Solutions
243 Tuxedo Avenue - Cleveland, Ohio 44131

encoderhelpdesk@nidec-industrial.com
+1 216-642-1230 - www.avtronencoders.com



Features and specifications are subject to change without notice.
EU-SMART™, SMARTSafe™, SMARTTach™, THIN-LINE™, WIDE-GAP™, SAFETach™ and BULLSEYE32™ are trademarks of Nidec Industrial Solution.
All other trademarks and registered trademarks are the property of their respective owners. Nidec Industrial Solutions' standard warranty applies.
All dimensions approximate.