


# Avtron XR115 SMARTSafe™ Encoders

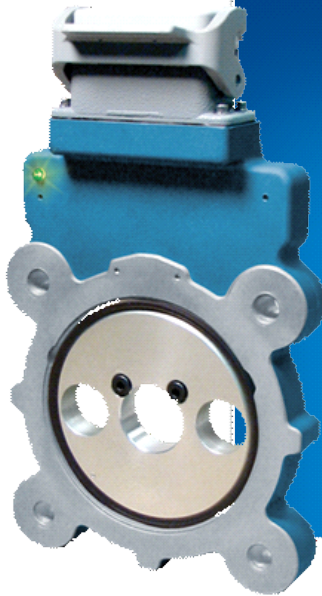

## Hazardous Duty Magnetic Encoder, Heavy Duty 115mm Modular

### Revolutionary No Bearing Design XR115

- | Fits IEC 115mm Motor Flanges
- | ATEX/IECEx Rated for Zone 1, 2, 21 & 22 Applications
  - | Ideal for Oil and Gas Drilling
    - | No Bearings to Wear Out
    - | Fully Potted Electronics
      - | Up to 5000 PPR
- | Wide Sensor-Rotor Gap: No Shimming or Scraping
  - | Protected Against Wiring Errors
- | Self-Diagnostic LED and Alarm Output
  - | 3 Year No-Hassle Warranty
  - | cULus Class I Division 1 Groups A,B,C,D Listed
  - | cULus Class I Zone 0 Group IIC
  - | cULus Class I Division 2 Groups A,B,C,D Listed

XR115 SMARTSafe 115mm modular incremental quadrature rotary encoders are a breakthrough in hazardous duty encoders. They are ATEX and UL approved and offer incredibly reliable no-bearing construction! SMARTSafe encoders can be used in gas and ATEX dust hazardous environments. Also available: hollow shaft models (XR45, XR685), shafted models (XR4F, XR485), and no-bearing modular encoders to fit other flange sizes (XR56, XR85, XR125, XR850).

For applications requiring ATEX/IECEx Zone 2 or 22 or UL Class I, Division 2 (Gas) Groups A,B,C,D use the XR115 directly in your application, with no barrier, isolator or cable gland required.


For applications requiring UL Division 1, ATEX/IECEx Zone 1 or 21 protection use the XRB3 isolator in your control cabinet which permits the use of intrinsically safe wiring instead of explosion-proof conduit or glands. The XR115 can also be used in UL Class I Div 1 & Zone 0 applications using the XRB3 Isolator.

Unlike the competition, Avtron SMARTSafe encoder systems are protected against short circuits, power-to-output wiring, and output-to-ground faults.

Instead of relying on a tiny optical encoder with weak bearings, install the most rugged encoders available for your drilling or industrial applications. Vibration, shock, liquids, dust and dirt won't harm SMARTSafe encoders! Paint booths, draw works, coil tubing rigs...XR115 can keep them all working 24/7/365.

Eliminate the biggest cause of Industrial Encoder failures. Eliminate the bearings with XR115 Hazardous Duty Encoders

# OUTLINE DRAWING

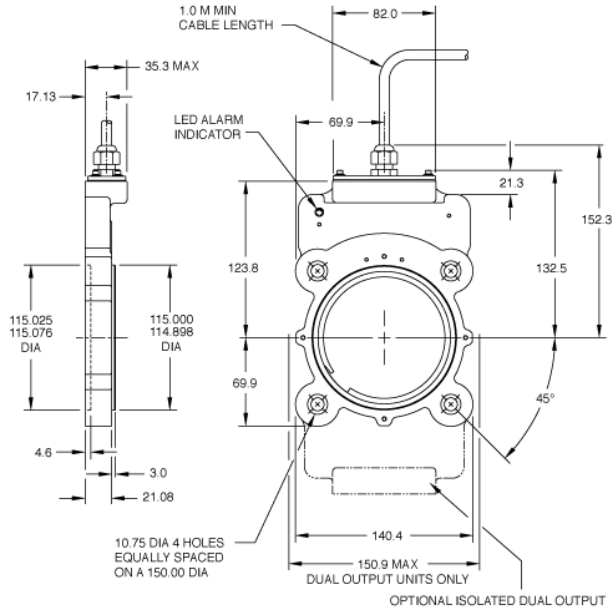

# MORE XR115 ADVANTAGES

- Replaces Hubner POG and OG and other shafted flange-mount encoders
- Eliminates large & costly flange adapters & flowerpots
- Fits shafts 10 - 85 mm
- Thin profile reduces overall motor depth
- No air gap adjustment required
- Shrugs off dirt, oil, and water contamination
- No glass disks to break or optics to fail
- 4,500,000+ hour MTBF design

# XR115 SPECIFICATIONS

**Operating Power:** (add load and cable drive current as req'd)

Division 1, Zone 1 (XRB3): 12-24VDC In/Out, 150 mA

Division 2, Zone 2: 5-24VDC In/Out, 150mA

**Output Format:** A Quad B with marker (A,/A, B,/B, Z,/Z)

**Frequency Range:** 0 to 165 KHz

**Maximum Cable Length:**

Division 1, Zone 1: Encoder 500' Isolator 1000'

Division 2, Zone 2 (5 to 12 VDC in): 500'

Division 2, Zone 2 (15 to 24 VDC in): 250'

**Temperature:** -40°C to 80°C (storage -40°C to 100°C)

**Environmental:** IP54 (see manual for details)

**Vibration:** 5-2000Hz, 20G, 100G Shock

**Weight:** 2-3lbs [.9-1.4kg]

**Certifications:**

ATEX/IECEX Zone 1 & 21 Group IIC

cULus Class I Div 1 and Zone 0 Group A,B,C,D\*

ATEX/IECEX Zone 2 & 22 Group IIC

cULus Class I Div. 2 Groups A,B,C,D

\*See installation drawings for Warnings and Limitations.

Check out our website for more detailed specifications, drawings, and installation instructions. [www.avtronencoders.com](http://www.avtronencoders.com)

# SELECTION GUIDE

XR115 PART NUMBERS AND AVAILABLE OPTIONS								
Model	Housing Type	Shaft Size (Thru Shaft Rotor)	Cover Style	Line Driver	Single/Left Output (PPR)	Right Output (PPR)	Connector	Modifications
XR115	1- Single Output 2- Dual Output	D0- Non. Std. Shaft Size XX- None  Thru Shaft Rotor (Metric) D2- 10mm DK- 38mm DA- 11mm DL- 42mm D3- 12mm DM- 45mm DB- 14mm DN- 48mm DC- 15mm DP- 52mm DD- 19mm DR- 55mm D4- 18mm DS- 60mm DE- 19mm MU- 65mm** DF- 24mm MV- 70mm** D5- 25mm MW- 75mm** DG- 28mm MY- 80mm** DH- 30mm MZ- 85mm** DI- 32mm DJ- 36mm  * Set Screw Rotor only	E- Extended Shaft Cover F- Flat Cover T- Flat Thin-Hole Cover with Shaft Seal (Seal not available on shafts larger than 75mm)	See chart at right	F- 60 Y- 1024 G- 100 Z- 1200 H- 120 3- 2000 A- 128 4- 2048 L- 240 5- 2500 N- 256 D- 4066 P- 300 8- 4800 E- 350 9- 5000 B- 480 0- Non-std. Q- 500 R- 512 S- 600 V- 600 J- 900	X- None J- 900 F- 90 Y- 1024 G- 100 Z- 1200 H- 120 3- 2000 A- 128 4- 2048 L- 240 5- 2500 N- 256 D- 4066 P- 300 8- 4800 E- 350 9- 5000 B- 480 0- Non-std. Q- 500 R- 512 S- 600 V- 900	See chart at right	000-No Modification 005-Super Magnetic Shielding (018-w/ Isolator XRB3 for cabinet mount) 4xx-Special PPR Code, consult factory 9xx-Special Cable Length, xxx=length * 0.3m

Line Driver Code				Connector Options
Level 1		Level 2		
Class 1 Div 1	Zone 1 & 21 (A)	Class 1 Div 2	Zone 2 & 22	
F	H	n/a	7	C- 10 pin MS (Avtron)
F	H	n/a	7	D- 10 pin MS (Dynapar)
F	H	n/a	7	*- 7 Pin MS
F	H	n/a	7	R- 10 Pin mini twist lock
F	H	n/a	7	W- Flexible cable with Gland
F	H	n/a	7	G- 10 Pin Industrial with Plug
F		G		H- Conduit Box, Terminal Block 1/2" NPT
F		G		M- Conduit Box, Terminal Block 3/4" NPT
F		G		N- Conduit Box, Terminal Block 1" NPT
F		G		B- Conduit Box, Terminal Block 25mm PT
XRB3	XRB3	None	None	Required Isolator: order separately or with option code 018

\*= E, F, J, K, S, T, U, V,

Units with connector options H, M, N or 8 are dual labeled for for both cULus Class / Div and ATEX / IECEX Zones



Nidec Industrial Solutions  
243 Tuxedo Avenue - Cleveland, Ohio 44131

encoderhelpdesk@nidec-industrial.com  
+1 216-642-1230 - www.avtronencoders.com



Features and specifications are subject to change without notice. EU-SMART™, SMARTSafe™, SMARTTach™, THIN-LINE™, WIDE-GAP™, SAFETach™ and BULLSEYE32™ are trademarks of Nidec Industrial Solution. All other trademarks and registered trademarks are the property of their respective owners. Nidec Industrial Solutions' standard warranty applies. All dimensions approximate.